

@KellyunionJames









Manufacturer

No.8, Zhugushi Chunyang Industrial Park, Longgang Street, Longgang District, Shenzhen City, Guangdong, China **Tel.** +86 178 0259 5686 Email: sales@kellyunion.com

Branch

Room 1505&1506, Building 6, Financial City No.5, Shiji Avenue, Chengnan District, Yancheng City, Jiansu, China **Tel.** +86 177 1253 6198 Email: wendy@kellyunion.com















BLOOD PRESSURE MONITOR



ACCESSORIES

P11

Description



























How to measure












WRIST TYPE

1


Roll or push up your sleeve to expose the skin. Apply the cuff to your wrist with your palm facing up.

Position the edge of the cuff about 1 to 2cm from wrist joints.

Fasten the wrist cuff around your wrist, leaving no extra room between the cuff and your skin.




Sit comfortably with your tested wrist resting on a flat surface. Place your elbow on a table so that the cuff is at the same level as your heart. Tum your palm upwards and sit upright in a chair.




1

Roll or push up your sleeve to expose the skin. Make sure your sleeve is not too tight. Hold your arm with your palm facing up and tie the cuff on your upper arm, align the Artery indicator with the main Artery (on the inside of your arm).



2


Make sure the bottom edge of the arm cuff 2 to 3 cm above the inside elbow. Then wrap the cuff securely.



3

Sit upright in a comfortable chair with your back against the backrest of the chair. Keep your feet flat and your legs uncrossed.

Place your arm resting comfortably on a flat table. The cuff worn on your arm should be placed at the same level as your right atrium of the heart.







(E ISO FDA





USB Type-C







2×99 sets of memory











Automatically off

RAK298 Arm Type









Date and time

indicator



USB Type-C



Battery level

indicator



2×99 sets of memory

(h)

Automatically

off











4×AAA batteries 1.5V

or DC 5V type-C port

2×99 sets of memory

139×94×43mm

REPORT HESRT RATE REPORT

78×71mm



2×99 sets of memory



RAK293

(E ISO FDA

Irregular heart beat indicator

Arm Type









Features

Date and time

indicator

Power Supply	4×AAA batteries 1.5V or DC 5V type-C port
Memory	2×99 sets of memory
Unit Dimensions(L×W×H)	138×100×59mm
LCD Size(B×H)	73.9×83.7mm

Screen Options

BLOOD PRESSURE MONITOR











Features 4×AAA batteries 1.5V **Power Supply** or DC 5V type-C port 2×99 sets of memory Memory Unit Dimensions(L×W×H) 144.8×122.2×46mm LCD Size(B×H) 105×73mm

Shell Color Optional



RAK292 Arm Type







indicator

Features

Power Supply

LCD Size(B×H)

Unit Dimensions(L×W×H)

Bluetooth Connection

Memory








indicator



Automatically off



Large Display















USB Type-C

Average



WHO scale





2×99 sets of memory

indicator off











USB Type-C













2×99 sets of memory













USB Type-C



Battery level

indicator









Features

Date and time

indicator

Power Supply	4×AAA batteries 1.5V or DC 5V type-C port
Memory	2×99 sets of memory
Unit Dimensions(L×W×H)	128×95×54mm
LCD Size(B×H)	67×58mm

Features

Date and time

indicator

Power Supply	4×AAA batteries 1.5V or DC 5V type-C port
Memory	2×99 sets of memory
Unit Dimensions(L×W×H)	128×95×54mm
LCD Size(B×H)	69×59mm

RAK295 Arm Type















Features

Power Supply

LCD Size(B×H)

Large Display

Unit Dimensions(L×W×H)

Memory





WHO scale





4×AAA batteries 1.5V

or DC 5V type-C port

2×99 sets of memory

128×95×55mm

80×74mm

Automatically off

ėů

2×99 sets of memory





Wrist blood

pressure monitor







WHO scale

Automatically off

Features

RAK286

Arm Type

(E ISO

Irregular heart beat indicator

USB Type-C

	Power Supply	4×AAA batterie	s 1.5V or DC 5V type-C port
-	Memory		2×99 sets of memory
-	Unit Dimensions	(L×W×H)	118×93.4×55.2mm
-	LCD Size(B×H)		68×55mm

BLOOD PRESSURE MONITOR















RAK-169 Wrist Type



























ėŪ

Features

Power Supply

LCD Size(B×H)

Optional LED


Unit Dimensions(L×W×H)

Memory

(€ ISO FD/A









Wrist blood

Date and time

indicator



indicator

AVG3

Average





High Norm

WHO scale



Wrist blood

pressure monitor

indicator







BLOOD PRESSURE MONITOR

WHO scale

ėů 2×99 sets of memory

Features

Power Supply

LCD Size(B×H)

Unit Dimensions(L×W×H)

Shell Color Optional

Memory







2×AAA batteries1.5V

2×120 sets of memor

109×144×64mmmm

78×93mm

Automatically

2×99 sets of memory

Date and time indicator

pressure monitor



Automatically

2×AAA batteries 1.5V

2×120 sets of memory

96×63×20mm

76×58mm

Features

(E ISO FDA

Power Supply	2×AAA batteries1.5V
Memory	2×120 sets of memor
Unit Dimensions(L×W×H)	80.4×65.5×24mm
LCD Size(B×H)	47×51mm

2×99 sets

of memory









ėŪ

2×99 sets

of memory

Power Supply	2×AAA batteries 1.5V
Memory	2×99 sets of memor
Unit Dimensions(L×W×H)	80×80×32mm
LCD Size(B×H)	44×63mm

Roll

Disposable



Customized

Shape and color



POCKET ECG MACHINE





BPM+ECG TYPE

P18

Description


























Data transfer functions










The ECG report can be sent to the remote via email, which is very convenient and fast.









ECG report

Support multiple data transmission methods over a Wi-Fi network and printing ECG Reports via an external printer.

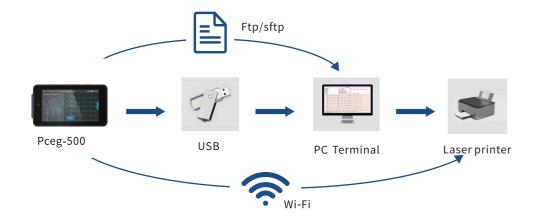

PCECG-500 Pocket ECG Machine





(€ ISO FD/A







Features

Power Supply

Transmission

Multi-lead Acquisition

Display

Camera



250g Light weight



Hd Camera

Rechargeable lithium battery

4.46" touch screen

6/12 Lead waveform

With HD camera

Wi-Fi

Wi-Fi

Transmission

Cardio Blood Pressure Monitor









BP2







Automatically




Micro USB port



Features

Power Supply	Micro USB, DC 5V
Blood Pressure Measurement:	Systolic, diastolic blood pressure and pulse rate
ECG Measurement:	30s recording with internal electrodes
Sync Data To App:	Real-time monitoring and sharing report
Unit Dimensions (L×W×H)	135×45×20mm



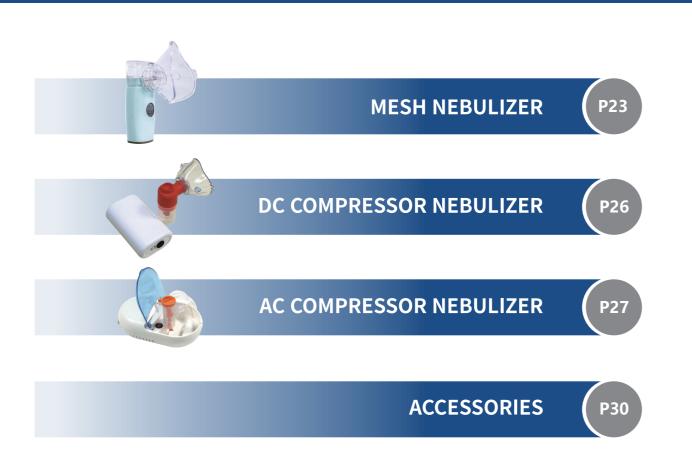

Description



Battery or USB



Light&Portable



Quiet



Speed is adjustable



One key use



Small particles



Rechargeable



USB Type-C



Little liquid residue



Handsfree



Family use



Medical level



Portable



Low noise

Remove mouthpiece from nebulizer.




3

Put available hot pure water in medical bottle (Water temperature:30°C-60°C), and push [START/STOP] button for 5 seconds to cleaning mode and spraving 1-2 minutes to clean.



One hand to hold the main unit, and push behind of main unit [PUSH] button, the other hand hold two sides of medical bottle, pull follow slot parallel, remove medical bottle.



5

Clean inside and outside surface of medical bottle, mouthpiece and nozzle by pure water, after cleaning, dry moisture of mesh by medical gauze slightly, and disinfected with 75% alcohol.



AEROSOL THERAPY





(E ISO



Battery or USB



Light & Portable



One key use



Small Particles

Features

Speed is Adjustable

Power Supply	DC 3.7V 500mAh Battery or USB connector:DC 5V,1A
Particle Size	MMAD: <2.5μm
Aerosol Output Rate	≥0.12 ml/min
Atomization Rate	≥0.25 ml/min
Unit Dimensions (L×W×H)	45×40×106mm

Art Printing



UN101





(E ISO



Rechargeable



Speed is Adjustable



One key use



Quiet

Small Particles

Features

Power Supply	DC 3.7V 500mAh Battery or USB connector:DC 5V,1A
Particle Size	MMAD: <2.5μm
Aerosol Output Rate	≥0.12 ml/min
Atomization Rate	≥0.25 ml/min
Unit Dimensions (L×W×H)	40×35×116mm

Removable Atomizer Sheet



UN200 Mesh Nebulizer









Features

Power Supply

Particle Size

Aerosol Output Rate

Atomization Rate

Unit Dimensions

(L×W×H)

Speed is Adjustable



One key use



Small

DC 3.7V 500mAh Battery or USB connector:DC 5V,1A

MMAD: <2.5μm

≥0.12 ml/min

≥0.25 ml/min

50×51.6×122mm



Speed is Adjustable

Battery or USB

(E ISO

UN300

Mesh Nebulizer



Light & Portable

One key use



Small Particles

Features

Power Supply	DC 3.7V 500mAh Battery or USB connector:DC 5V,1A
Particle Size	MMAD: <2.5μm
Aerosol Output Rate	≥0.12 ml/min
Atomization Rate	≥0.25 ml/min
Unit Dimensions (L×W×H)	50×50×118mm

With Digital Screen

















USB Type-C



Handsfree



Small particles


Quiet

Features

Speed is adjustable

Power Supply	DC 3.7V 500mAh Battery or USB connector:DC 5V,1A
Particle Size	MMAD: <5μm
Aerosol Output Rate	≥0.12ml/min
Atomization Rate	≥0.25 ml/min
Unit Dimensions (L×W×H)	65×45×75mm

Nature-inspired



UN103 Mesh Nebulizer









USB Type-C



Speed is adjustable





Small particles

Quiet

Features

Power Supply	DC 3.7V 500mAh Battery or USB connector:DC 5V,1A
Particle Size	MMAD: <5μm
Residual Liquid	≥0.12ml/min
Atomization Rate	≥0.25 ml/min
Unit Dimensions (L×W×H)	50×42×40mm



UN106 Mesh Nebulizer







Speed is adjustable

Features

Power Supply

Particle Size

Aerosol Output Rate

Atomization Rate

Unit Dimensions

(L×W×H)

Portable





Handsfree

Light & Portable



DC 3.7V 500mAh Battery or USB connector:DC 5V,1A

MMAD: <5µm

≥0.12ml/min

≥0.25 ml/min

60.8×44.5×55.7mm

particles





















Little liquid residue



26

AEROSOL THERAPY

particles

Features

Light & Portable

Power Supply	AC 220V 50Hz 0.5A Output: DC 12V/1A
Particle Size	MMAD:3.5µm±25%
Compressor Air Flow Rate	≥3.0L/min
Average Nebulization Rate	≥0.1ml/min
Unit Dimensions (L×W×H)	116×74×48mm



Power Supply	DC 3.7V 500mAh Battery or USB connector:DC 5V,1A
Particle Size	MMAD: <5μm
Residual Liquid	≥0.12ml/min
Atomization Rate	≥0.25 ml/min
Unit Dimensions (L×W×H)	50×42×40mm

Light Weight: Only 42g















Medical level

Small particles

Portable



Little liquid residue



Small particles

Portable

Little liquid residue



Medical level

(E ISO

Family use

Features

Power Supply	AC 220V 50Hz
Particle Size	MMAD:4µm
Compressor Air Flow Rate	≥4.5L/min
Average Nebulization Rate	≥0.2ml/min
Unit Dimensions (L×W×H)	282×170×84mm



Features

Power Supply	AC 220V 50Hz
Particle Size	MMAD:4μm
Compressor Air Flow Rate	≥4.5L/min
Average Nebulization Rate	≥0.2ml/min
Unit Dimensions (L×W×H)	230×190×90mm

RAK361 AC Compressor Nebulizer







Medical level

Features

Power Supply

Particle Size

Compressor Air Flow Rate

Average Nebulization Rate

Unit Dimensions

(L×W×H)



Portable





AC 220V 50Hz

≥6.0L/min

MMAD:3.5µm±25%

0.30~0.55ml/min

176×176×101mm

Low noise

RAK362 AC Compressor Nebulizer







Medical level



Features

Power Supply	AC 220V 50Hz
Particle Size	MMAD:4μm
Compressor Air Flow Rate	≥8.0L/min
Average Nebulization Rate	≥0.2ml/min
Unit Dimensions (L×W×H)	186×156×95mm

28











(E ISO



Family use particles



Small

Portable



Little liquid residue



Medical level

(E ISO

Family use









Little liquid residue

Features

Medical level

Power Supply	AC 220V 50Hz
Particle Size	MMAD:4µm
Compressor Air Flow Rate	≥4.5L/min
Average Nebulization Rate	≥0.2ml/min
Unit Dimensions (L×W×H)	160×132×75mm

Features

Power Supply	AC 220V 50Hz
Particle Size	MMAD:4µm
Compressor Air Flow Rate	≥4.5L/min
Average Nebulization Rate	≥0.2ml/min
Unit Dimensions (L×W×H)	150×150×100mm

RAK365 AC Compressor Nebulizer







Family use



Medical level

Features

Power Supply

Particle Size

Compressor Air Flow Rate

Average Nebulization Rate

Unit Dimensions

(L×W×H)



Portable



Low noise

AC 220V 50Hz

MMAD:4µm

≥8.0L/min

≥0.2ml/min

158×156×100mm

Little liquid residue

RAK366 AC Compressor Nebulizer











Medical level



Small particles



Portable



Low noise

Features

AC 220V 50Hz
MMAD:3.5µm±25%
≥6.0L/mir
0.30~0.55ml/mir
210×170×110mm

30

Spacer for Aerosols





(E ISO

Features

Size	Adult , Child and Pediatric
Capacity	175ml/225ml/350ml
Color	Yellow and Blue
Packing	Blister packing with box
Material	Silicone & PETG

Three-Ball Spirometer





(E ISO

Features

Main Chamber Material	PS
Indicated Ball Material	ABS
Mouth Piece Material	PP
Size	136×71×144mm
Inspiratory Capacity Of Main Chamber	600ml/sec 900ml/sec 1200ml/sec

Accessories

Nebulizer Cup



Double-Way & One-Way I	Nebulizer
Item No.	TW8520C
MMAD	2.58 _µ m
Atomization Rate	0.5ml/min
FPF	> 76%
Capacity	≤ 8ml



Rotary Knob Nebulizer	
Item No.	Tw8810
MMAD	2.25µm
Atomization Rate	0.2-0.4ml/min
FPF	> 80%
Capacity	≤ 8ml



Low Starting Nebulizer	
Item No.	TW8520A
MMAD	2.58µm
Atomization Rate	0.2-0.6ml/min
FPF	> 72%
Capacity	≤ 8ml



Button Adjustment Nebulizer	
Item No.	TW8505E
MMAD	2.5µm
Atomization Rate	0.16-0.6ml/min
FPF	> 76%
Capacity	≤ 8ML



Nebulizer Kit With Mask & Tubing

Size	XL/L3/L/M/S/XS
Item No	TW8345

Optional



Face Mask (adult/child)



Rotary Type Mask



Mouthpiece (one-way valve)



Mouthpiece



Elbow



Silicone Nosepiece



Air Tube (wing shaped connector)




Air Tube (round shaped connector)










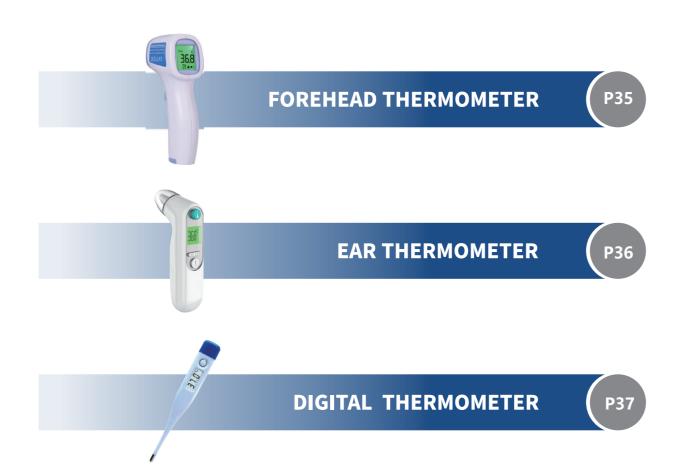

Description






































Infrared technology





(E ISO



Forehead measure

(**<u>*</u>

Fever warning

Features



32 Memory function

Tri-color indicator light



Object room measure



One second reading

FC-IR207 Forehead











Forehead measure



Fever warning

Features

Power Supply

Memory

LCD Size

LED Indicator



Tri-color indicator light



Object room measure



One second reading

2×AAA batteries 1.5V

35 Memories

23.2×21.6mm

157×35×36mm

KFT-28 Forehead







Forehead measure

(#<u>*</u>

Fever warning



Tri-color indicator light

32 Memory function



Object room measure



One second reading



FC-IR109 Ear









Tri-color indicator light



Object room measure



One second reading

2×AAA batteries 1.5V
32 Memories
29×24mm
145×42×83mm

Three Color Backlight



NORMAL TEMP



LOW FEVER







NORMAL TEMP

Unit Dimensions (L×W×H)







HIGH FEVER

Features

Power Supply	2×AAA batteries 1.5V
Memory	64 Memories
LCD Size	27×27mm
Unit Dimensions (L×W×H)	155×67×67mm





Features

Fever warning

Power Supply	2×AAA batteries 1.5V
Memory	35 Memories
LCD Size	23.5×27.5mm
Unit Dimensions (L×W×H)	155.5×35×65.5mm

Basic Model Optional



36





Auto off

Features

Power Supply

Measurement Range

Unit Dimensions (L×W×H)



Soft beep



1.5V (LR41 or LR41H)

32.0°C-42.9°°C(90.0°F-109.2°F)

20/30/60 seconds optional

128.5×17.6×9.4mm

20×7.5mm



Last reading









60 Sec







Waterproof



Low battery

Features

Power Supply	1.5V (LR41 or LR41H)
Measurement Range	32.0°C-42.9°°C(90.0°F-109.2°F)
Test Time	20/30/60 seconds optional
LCD Size	20×7.5mm
Unit Dimensions (L×W×H)	123×18.7×10.5mm

Multicolor

Test Time

LCD Size



Multicolor / No Metal Tip











Features

Power Supply

Test Time

LCD Size

Multicolor

Measurement Range

Unit Dimensions (L×W×H)





Fever warning

Waterproof



1.5V (LR41 or LR41H)

20×7.5mm

129×17.6×9.4mm

32.0°C-42.9°°C(90.0°F-109.2°F)

20/30/60 seconds optional

Low battery



(E ISO

 $\left(\begin{matrix} \begin{matrix} I \end{matrix} \right)^A$

PT-101C

Digital Flexible Thermometer

Last reading











Flexible

Features

Power Supply	1.5V (LR41 or LR41H)
Measurement Range	32.0°C-42.9°°C(90.0°F-109.2°F)
Test Time	20/30/60 seconds optional
LCD Size	20×7.5mm
Unit Dimensions (L×W×H)	126×18.5×10mm

Soft beep

Multicolor





38





Auto off



Waterproof







Last reading

PT-02E















Last reading memory



Flexible



1.5V (LR41 or LR41H)

32.0°C-42.9°°C(90.0°F-109.2°F)

20/30/60 seconds optional

20×7mm

140×29×12mm







Fever warning



Features

Power Supply	1.5V (LR41 or LR41H)
Measurement Range	32.0°C-42.9°C(90.0°F-109.2°F)
Test Time	20/30/60 seconds optional
LCD Size	20×7.5mm
Unit Dimensions (L×W×H)	124×19×12mm

Multicolor



Features

Power Supply	1.5V LR41H
Measurement Range	32.0°C-42.9°°C(90.0°F-109.2°F)
Test Time	15 seconds optional
LCD Size	34×28mm
Unit Dimensions (L×W×H)	140×34×16mm

Multicolor



YD-207

(E ISO

60 Sec

Auto off

Features

Power Supply

Test Time

LCD Size

Measurement Range

Unit Dimensions (L×W×H)

Various Cartoon Head













(E ISO

60 Sec

YD-207

Digital Bath Thermometer



Last r

Flexible

Features

Power Supply	2*1.5V LR44 button battery
Measurement Range	0°C-70°C/32F-158°F
Test Time	60seconds
LCD Size	17*22mm
Indicator	green ,red color

Various Cartoon Shape





BLOOD GLUCOSE METER



REGUAL TYPE




ACCESSORIES




Description



































250 times memory function



No coding



Insert&Using



7 Seconds reading

A608 **Blood Glucose Meter**















24/7 Monitoring



Helpful trend chart

Customizable alerts &Notifications

Features

Date management

Power Supply	3V CR2032
Measurement Range	1.1-33.3mmol/L(20-600mg/dL)
Blood Volume	1 ul
Test Time	7 Seconds
Unit Dimensions (L×W×H)	89×57×19mm

Features

Comfortable&Easy to Wear

Power Supply	3V CR2032	
Measurement Rang	< 5.55mmol/L,±0.83 mmol/L deviation allowed e ≥5.55 mmol/L, ±15% deviation allowed	
Repeatability	Result<5.55 mmol/L, SD <0.42 mmol/L Result≥5.55 mmol/L, CV <7.5%	
Lifespan	5 years	
Blood Glucose Mon	itor Dimensions (LxWxH) 114×48×165mm	



Lancets





Color	Soft Reorder#	Gaue
1	01-0133	33G needle
Ü	01-0130	30G needle
1	01-0128	28G needle
1	01-0126	26G needle
1	01-0123	23G needle
1	01-0121	21G needle
Package	100 pcs/box	1,000 pcs/case

Needle For Insulin Injection Pen






Color	Needle Length	
	4mm	32G needle
	5mm	31G needle
	6mm	31G needle




STETHOSCOPE

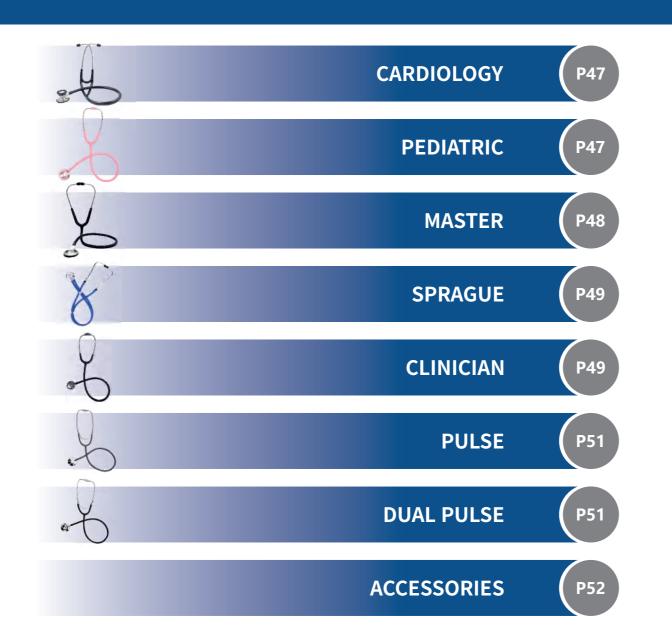

Description
































(E ISO



Suitable for

adults and children

Turnable dual head



Suitable for hospital and family



Stainless steel material





Sound very clearly

KS-2027 **Pediatric**











Stainless steel

material



Suitable for hospital and family



Medical pvc tube



Sound very clearly

Features

Chestpiece	Stainless steel
Binaurals	Stainless steel/Silicone
Tube	19" PVC A tubing style
Diameter of Head	32/46mm

Dual Diaphragm Edition







Features

Chestpiece	Stainless steel
Binaurals	Stainless steel/Silicone
Tube	Flexible 22" PVC tubing
Diameter of Head	30/39mm

Multicolor Tube



KS-2032A









Medical pvc tube

Features



Stainless steel material

Comfortable



Suitable for hospital and family



Sound very clearly













Closed earplugs







Medical pvc tube



Sound very clearly

Chestpiece	Stainless steel
Binaurals	Stainless steel/Silicone
Tube	Flexible 22" PVC tubing
Diameter of Head	37mm

Multi Cartoon Head









Features

Chestpiece	Zinc alloy
Binaurals	Stainless steel/PVC
Tube	Flexible 22" PVC tubing
Diameter of Head	46mm

A-Shape **Tube Edition**

Black and **Gold-Plated Edition**







47

48





(E ISO



Suitable for hospital and family



Comfortable





Sound very clearly





Medical pvc tube



Stainless steel material





Features

Medical pvc tube

Chestpiece	Zinc alloy
Binaurals	Aluminium alloy/PVC
Tube	22" PVC straight tubing
Diameter of Head	31/45mm

Black and Gold-Plated Edition





KS-2026 Clinician





(E ISO



Suitable for adults and children





Sound very clearly

Features

Chestpiece	Stainless steel
Binaurals	Stainless steel/Silicone
Tube	Flexible 22" PVC tubing
Diameter of Head	36/46mm

A-Shape Tube Edition







Suspension Diaphragm

KS-2026B **Gold and Colorful Clinician**







Clinician use



Medical pvc tube



Stainless steel material





Sound very clearly



Clinician

KS-2057



(E ISO




Medical pvc tube

Features

Chestpiece

Binaurals





Comfortable



Turnable dual head



Sound very clearly

Aluminium alloy

31/45mm

Aluminium alloy/PVC

Flexible 22"transparent PVC tubing

Features

Chestpiece	Stainless steel
Binaurals	Stainless steel/Silicone
Tube	Flexible 22" PVC tubing
Diameter of Head	36/46mm

Color and Black Edition



Diameter of Head

Multicolor

Tube











Suitable for hospital and family



Eazy to carry



Closed earplugs

Sound very clearly

KS-2045 Dula Pulse











Medical pvc tube



Turnable dual head





Closed earplugs

Features

Medical pvc tube

Chestpiece	Aluminium alloy
Binaurals	Aluminium alloy/PVC
Tube	21" PVC tubing Tube
Diameter of Head	45mm

Multicolor











Comfortable

Sound very clearly

Features

Chestpiece	Aluminium alloy
Binaurals	Aluminium alloy/PVC
Tube	21" PVC tubing
Diameter of Head	30/45mm

Multicolor



Accessories

Chestpiece















Tube



Red	1797C
Pink	212C
Green	3288C
Blue	286C
ight Blue	298C
Grey	7C
Purple	7677C

Pantone Code

Color

Yellow

Black

Dark Blue

Color Swatch

1225C

Black 6 C

281C



ANEROID SPHYGMOMANOMETERS



ANEROID SPHYGMOMANOMETER

P57



ANEROID/STETHOSCOPE KIT

P57



PALM ANEROID SPHYGMOMANOMETER





MOBILE ANEROID SPHYGMOMANOMETER


P62

ACCESSORIES



Description





























HOW TO OPERATE



Place the stethoscope at the intersection of the blood vessels



Make the armband point at the in tersection Of the blood vessels



Observe the instructions of the sphygmomanometer



When the first pulse sound is heard, it is considered to be high pressure and contraction.

If you continue to deflate, you can hear a strong pulse sound through the stethoscope, and gradually lighten it until you hear a smoother than normal pulse sound.

At this time, the blood vessel is considered to be completely uncompressed, and it is regarded as lowpressure.




Place the stethoscope at the intersection of the blood vessels

ANEROID SPHYGMOMANOMETERS



Air pressure in the balloon squeezing blood vessels



Slowly deflate, pay attention to the sound of pulse







Suitable for hospital and family



Inflation bulb Easy to use

Features



Cuff not easy To fall off



High accuracy



Easy-to-read



Storage bag

KS-1623 Aneroid Sphyg







Suitable for hospital and family



Inflation bulb Easy to use



Cuff not easy To fall off



High accuracy



Storage bag

Measuring Range	From 0 - 300mmHg with non stop pin	Manometer Calil	From 0 - 300mmHg with non stop pin 80-160mmHg with red marking
Cuff	Adult Velcro calibrated nylon /Cloth cuff	Cuff	Adult Velcro calibrated nylon /Cloth cuff
Power Source	Manual inflation	Power Source	Manual inflation
Valve	Standard air release	Valve	Standard air release

KS-2201 **Pocket Aneroid/Scope Kit**







Suitable for hospital and family



Inflation bulb Easy to use

Features

Stethoscope

Power Source

Valve

Sphygmomanometer

Aneroid



Aneroid sphygmometer with stethoscope



High accuracy



Storage bag



Home Use Sphygmomanometer Kit

Suitable for hospital and family









Aneroid sphygmometer with stethoscope



Storage bag

58

ANEROID SPHYGMOMANOMETERS

Aneroid Sphygmom	anometer Adult type
Cuff	Nylon cuff with D-ring the single head stethoscope is fxed to cuff
Matieral	Aluminium alloy case,PVC bulb
Valve	Dual use air-release taper end valve with spring







Manometer Calibrated		From 0 - 300mmHg with non stop pin 80-160mmHg with red marking
Cuff	Adult Velcro	calibrated nylon /Cloth cuff
Power Source		Manual inflation
Valve		Standard air release





Adult type

Single head

Manual inflation

Standard air release



Inflation bulb Easy to use

(E ISO

KS-2021



High accuracy











Suitable for hospital and family



High accuracy



Easy-to-read



Storage bag

Features

Inflation bulb

Easy to use

Aneroid Sphygmomanometer	Adult type
Stethoscope	Color-matched sprague-rappaport
Power Source	Manual inflation
Valve	Standard air release

KS-2201A

Kids Pocket Aneroid/Scope Kit







(E ISO

Suitable for hospital and family



Inflation bulb Easy to use



High accuracy

Storage bag

Pediatric

Features

Aneroid Sphygmomanometer	Kids type
Cuff	New born+child
Power Source	Manual inflation
Valve	Standard air release



Child Type



KS-3103 Palm Aneroid/Sprague Kit







Suitable for hospital and family



Features

Measuring

Power Source

Range

Dial

Easy to carry



Palm model



High accuracy





Storage bag

From 0-300mmHg

with non stop pin

Manual inflation

50/68mm

Heavy duty chrome plated zince



Suitable for hospital and family



(E ISO

KS-3301

Palm Aneroid Sphyg

Large dial





ABS plastic case



One-handed



Storage bag

Features

Measuring Range	From 0-300mmHg with non stop pin, 90-140mmHg with red marking
Power Source	Manual inflation
Manometer Material	ABS plastic case
Dial	60mm

Calibratable

Manometer Material



Twin Tube Edition

















KS-3203A Mobile Aneroid Sphyg









Suitable for hospital and family



Large dial





High accuracy



One-handed Use Suitable for hospital and family



Storage bag Easy to carry





Palm model

High accuracy



Easy-to-read



Storage bag





High accuracy



One-handed Use



Storage bag





High accuracy



Easy-to-read





Features

61

ANEROID SPHYGMOMANOMETERS

Measuring Range	From 0-300mmHg with non stop pin
Manometer Material	Heavy duty chrome plated zince alloy
Power Source	Manual inflation
Dial	68mm

Twin Tube Edition



Features

(E ISO

Measuring Range	From 0-300mmHg with non stop pin
Manometer Material	Heavy duty chrome plated zince alloy
Power Source	Manual inflation
Dial	50/68mm

60m Scale Edition



Features

Inflation bulb

Easy to use

Suitable for hospital and family

(E ISO

Measuring Range	From 0-300mmHg with non stop pin	
Manometer Material	ABS plastic case	
Power Source	Manual inflation	
Dial	6 inch	

Customized Color









Suitable for hospital and family



Easy to use

Accessory

Swivels Up

Stand Column

Dial



Base with 5 castors and locking braket

110 degrees for side-angle

This apparatus a two-piece stand column which easily adjustable 110cm to 150cm




6 inch



Accessories

Aneroid Manometer

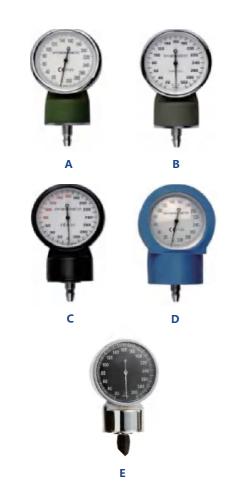

Description

Α	Stop pin type
В	Non stop pin type
С	Black static-painting
D	Color powder-coating
E	Chrome-plated

Bladder and Cuff






Description

	PVC BLADDER	LATEX BLADDER	CUFF
New Born	40×80mm	40×80mm	210×60mm
Linfant	110×60mm	110×60mm	250×70mm
Child	170×90mm	170×90mm	350×110mm
Adult	220×120mm	220×120mm	530×145mm
Large Adult	310×140mm	310×140mm	650×185mm
Thigh	350×170mm	350×170mm	785×220mm

Bulb W/ End Valve

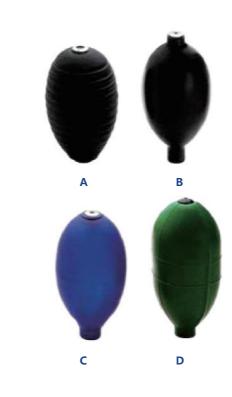

Air Release Valve



Description

Α	Pvc ribbed bulb with taper metal net and end valve
В	Standard latex bulb with end valve
С	Standard PVC bulb with end valve
D	Rubber bulb with plastic end valve

Description

Α	Plastic push-button air release valve
В	Deluxe air release filter valve with spring
С	Premium air release filtert valve with spring
D	Standard air release valve with spring
E	Copper connector

ANEROID SPHYGMOMANOMETERS



ENT DIAGNOSTIC INSTRUMENTS



Description






























5 Apertures for option



How to use

OTOSCOPE



push down the switch to on the device



2 choose a right size ear speculum



Installation of ear speculum



Diagnose by aiming the light to the patients' ears

OPHTHALMOSCOPE



Aluminium alloy/PVC



Adjust the aperture here



Push the two sides of the diopter whee in the mean time to screw for aperture selection



Diagnose by aiming the light to the patients' eyes

67

ENT DIAGNOSTIC INSTRUMENTS















Otoscope & Ophthalmoscope Set



















LED white /LED sunlight









3X magnification

(E ISO



LED white /LED sunlight



Re-usable&Washable ear tips



Ergonomic handle



Interchangeable tips

(E ISO

Larger view window



Re-usable&Washable ear tips



Inside bulb

LED white

/LED sunlight

Updated structures

Direct ophthalmoscope

(E ISO

Gift box

LED white

/LED sunlight

Ergonomic handle

5 Apertures

for option

Updated structures

Features

A standard handle

2.4mm/3mm/4mm/5mm ear tips

A head of fiber optic otoscope (OT10)

A head of direct ophthalmoscope (OP10)

Optional package



Features

Direct illumination

2.4mm/3mm/4mm/5mm ear tips of two sets

The clip with integrated on/off switch

3500k and 6000k color temperature LED bulb

XHL Xenon Halogen bulb are optional

Multicolor



Features

Fiber optic illumination

3X magnification for the large size viewing window

2.4mm/3mm/4mm/5mm ear tips of two sets

The socket of ear insufflation bulb

3500k and 6000k color temperature of LED bulb

XHL xenon halogen bulb are optional

Multicolor





Coaxial parallel light principle

5 different apertures

19 kinds of adjustable corrective lenses

3500k color temperature LED bulb

XHL Xenon Halogen bulb are optional

The clip with integrated on/off switch





ENT DIAGNOSTIC INSTRUMENTS







Otoscope& ophthalmoscope set



Updated structures



Ergonomic handle



LED white /LED sunlight



USB desktop charger

Features

A fiber optic otoscope (OT10)

A direct ophthalmoscope (OP10)

2.4mm/3mm/4mm/5mm ear tips two sets

Optional package



HS-402F3

General Optic Otoscope



(E ISO



Otoscope



Easy to carry



Interchangeable tips



Gift box

Features

Inside bulb

Power Supply	2×AAA batteries 1.5V
Size	147×53mm
Package	Blister/Plastic box
Color	White,black

Package



HS-401F3 **Diagnostic Penlight**







(E ISO

Features

Power Supply	2×AAA batteries 1.5V
Size	127×15mm
Material	Aluminium alloy

Multicolor



401G3 Buck Hammer









Compact and portable

Multiple

specifications



Compact and portable



Not easily deformed



Hammer head made of PVC material





Zinc	al	loy	hand	le
------	----	-----	------	----

PVC head

Diagnostic Pin can be screwed off conveniently in the head

Diagnostic brush can be taken out in the end

Taylor Edition







ENT DIAGNOSTIC INSTRUMENTS



INFUSION THERAPY EQUIPMENT



INFUSION PUMP (P75)





SYRINGE PUMP (P77)





ENTERAL FEEDING PUMP (P78)



Description























































Features

Adjustable 10 levels setting

Volume mode, time mode, drug mode

Big screen and numeric keypad

Up and down occlusion sensor with DPS system

3000mAh battery and backup time more than 10 hrs





(E ISO









Features

High Resolution Image

Multiple Sizes and Brightness Display

Three modes display:Normal, enhanced and deep mode

Three puncture position prompts:deep,medium,and shallow

Multiple colors optional for different skin

HF-110A **Blood and Infusion Warmer**





(E ISO











Features

Long, middle, short three heating groove

Multiple temperature control protection technology

Small design, 0.2kg weight, more installation way optional

2mins fast heating for the blood or fluid

High accuracy:deviation is within $\leq \pm 1^{\circ}C$

HF-110B **Blood and Infusion Warmer**



















Dry flow process, easy installation, fast heating

Medical Silicone Heating Profile

Multiple Temperature Control Protection Technology

Display temp, time, alarm massage, working status

Different Kinds Heating Profile

INFUSION THERAPY EQUIPMENT

















HF-210A **Warming System**





(E ISO









(E ISO









(E ISO

HF-910A

Enteral Feeding Pump









(E ISO















Features

UI design, friendly interface

Battery capacity: 2600mAh battery

Backup time: More than 12 hours

Occlusion, alarm volume, brightness adjustable with 8 levels

High flow rate:0.1~2000ml/h adjustable

Features

Friendly UI interface, like ATM interface.

3000mAh battery and backup time more than 6hrs

Occlusion, alarm volume, brightness adjustable with 8 levels.

Injection Mode:Constant rate,volume/time,drug mode, micro-mode,programmable mode

Event Log:More than 10000 logs

Features

Big touch screen, friendly interface

Heating function keeps the nutrition warm.

10 level alarm volume and brightness, night mode optional

Feeding Mode: Continuous and intermittent optional

WIFI connection to working station

Features

8 adjustable wind volume, 4 level quick menu

Double hardware and software temperature protection.

17 kinds disposable and 8 kinds reusable blankets optional

More than 10,000 logs for necessary search.

G4 (EN779) grade air filter and plasma air purification function

INFUSION THERAPY EQUIPMENT



DAILY CARE AIDS



CRUTHES (P81



REHABILITATION EQUIPMENT (P85)




WHEELCHAIR (P89)



Description





Anti slip design

Lightweight and portable

4 in 1 Plastic Chair

Easy folding in one step

360 universal wheel

Corrosion and rust prevention

Waterproof seat cushion

Stable and secure

Comfort

NO drilling installation required







SC2021 Folding Stick



SC2011 Cruthes





























Features

(E ISO

Grip Material: PP+TPR

Metal Tube: Aluminum foot mat, 1.2mm tube wall thickness

Load Capacity: 100-110kg

Pipe Diameter: 22mm (thick), inside diameter of foot pad 20.5mm

Adjustable Holes: 5 for upper limb, 9 for lower limb

Features

(E ISO

Grip material :PP+TPR, metal pipe: aluminum

Y-shaped support pipe: high-strength plastic

Foot mat: rubber

The upper limb is regulated by 8 holes and the lower limb by 9 holes

Height range: 101.5-148.5cm

Features

(E ISO

Grip material	foam
Metal pipe	Aluminum
Foot mat	rubber
Height range	80-100cm



Features

Grip material	foar
Metal pipe	Aluminur
Foot mat	rubbe
Height range	77-100cr





SC3001-3003 Walking stick







3

SC1040FR-2 Elbow crutch









(E ISO

Grip material PP















Features

Grip material

Metal pipe

Foot mat

Height range





PP+TPR

Aluminum

92-115 cm

rubber













Features

Grip material

Metal pipe

Foot mat

Height range

(E ISO





foam

rubber

75-95 cm

Aluminum +FE

8

Features

Grip material	PP
Metal pipe	Aluminum
Foot mat	rubber
Height range	92-115 cm



Comfort

Grip material	PP
Metal pipe	Aluminum
Foot mat	rubber
Height range	92-115 cm



Grip material	foam
Metal pipe	Aluminum
Foot mat	rubber
Height range	78-100cm







SC4010W Walker without wheels













SC5011G-8 Aluminum Economic Rollator



























86











Features

Grip material

Metal pipe

Foot mat

Seat plate











Aluminum

rubber

PP

_	
д	
veight and	

©
Stable and secure



Features

Main tube: 1.2mm

(E ISO

9	Side frame: aluminum
9	Support bars steel
	Foot pads: rubber
	Adjustment height: 8 holes
	One-click folding

Features

Main tube: 1.2mm

(E ISO

SC4010 Walker with wheels

Side frame: aluminum	
Support bars steel	
Foot pads: 5 inch PVC wheel	
Adjustment height: 5 hole adjustment	
One-click folding	

Features

Height adjustable rollator, Aluminum 8" pvc wheels

Attached removable shopping bag, Foam padded seat

Weight Capacity: 136KG(300LBS)

Seat Height: 46-52.8 cm



SC6020A Circular Bath Bench



SC6058 Bath chair





(E ISO


















(E ISO



























(E ISO





88

Features

Side frame/foot pads	steel/ rubber
Adjustment height	7 holes adjustment
Plastic seat cover plate	PP
Main tube	1.2mm

Features

Tube thickness	1.2mm
Seat	HDPE,490*250mm
Total Height	355-455mm
Height Adjustment	5 hole adjustment

Features

Seat	PF
Foot tube	Aluminium
Foot pad	rubbe
Total Height	400-575mm

Material: PP+ fiber
Tube: Aluminum
The armrests and backrests are detachable
Overall Height: 81.6-93.6 cm,seat Height: 45.6-57.6 cm













SC8088A 4 in 1 Plastic Chair























90





A variety of functions: bath chair, Comode Chair, Raised Toilet Seat

Bearing capacity 180kg, sgs certification, safe and stable

Armrest can be lifted back, pressing type fixed, convenient side entry

Adjustable and detachable footrest with adjustable pedals

Four 5-inch casters with brakes, with stop

SC9001 Basic manual wheelchair



















Features

Plastic outer handwheel, fixed armrest, fixed foot

8 "PVC front wheel, 24" rear wheel

Material: Iron, electroplated frame, black footrest;

Maximum load 100kg

Features

Plastic outer handwheel, fixed armrest, fixed foot

8 "PVC front wheel, 24" rear wheel

Material: Iron, painted frame, black foot

Maximum load 100kg

(E ISO















Pipe Thickness: 1.2mm

Adjustable Handrail & Detachable Plastic Footrest

Fabric material: PVC+ sponge + plastic

















Features

Material: Iron, grey spray

5-inch Wheels (Fe + Nylon), Load Capacity: 100kg



SC-OT16 Overbed table



SC-HEB355 **Hospital Bed**



M7B-P4000W AIR MATTRESS





(E ISO























Features

Metal: Steel

Wheel: 2 inch PVC

Desktop: high-density wood







Back rest tilting:75°±5°

Thighresttilting:35°±5°





(E ISO













(E ISO











Features

Product material: PP+ fiber

The handrail is detachable and can be lifted

Three-level height adjustment

Three height adjustment levels: 9.5cm-12.9cm-16.4cm

Features

Over all dimension:L2100*W980*H430-720mm±10mm

Hi-lo adjustment between:430-720mm±10mm

Features

High-frequency welding, one-time molding (Japanese Toshiba components)

Mattress material: odourless medical-grade PVC,thickness: 0.32 mm

Cold resistance temperature: -30°C

Number of bubbles: 130

Maximum load capacity: 135 kg







SPORT WATCH

P95



MEDICAL GRADE WATCH

P95

Description



Kcal



Walking step



ECG



Heart rate



Blood pressure monitoring



Blood oxygen



Sleep monitoring



Workouts



Find phone



Incoming calls and messages notifications



Thermometer monitoring



Activity control: ps, colories, distance



Respiratory rate













Blood pressure monitoring

Light



Blood







EŽ

Thermometer


monitoring

Walking step















Air pump pressurization technology

family and friends







Heart rate



Blood pressure

monitoring

Find phone



Incoming calls and messages notifications

O2

Blood

oxygen

P700 Smart Watch(BPM+ECG+SUGAR)







ECG

Sleep monitoring



秀

Workouts







monitoring





O₂

Incoming calls and messages notifications

Features

Activity control:

ps,colories,distance

Support System	IOS 8.4 and above /Android 4.4 and above
Bluetooth Version	4.0BLE
Display Resolution	160×80
Languages	Chinese English

Temperature Test



Features

Supported Systems	Android 4.4 and above iOS 8.2 and above
Bluetooth Version	4.2BLE (low power consumption)
Display Resolution	240*280

Bluetooth Version		4.2BLE (low power consumption)
Display Reso	lution	240*280
Languages	Russian, Italian, Fr	English, Japanese, Germar ench, Spanish, Portuguese se Korean Persian (Arabic

Features

(E ISO

ECG

KSO3PRO

Smart Watch (ECG + SUGAR)

Support Sys	tem	Android 4.4 and above IOS 8.0 and above
Bluetooth V	ersion	5.1BLE (low power consumption)
Display Reso	olution	320*386
Chinese, Traditional Chinese, English, Japanese, German Russian, Italian, French, Spanish, Portuguese, Thai, Czech Languages Greek, Polish, Vietnamese, Turkish, Romanian, Hungarian Danish, Finnish, Arabic, Ukrainian, Hebrew, Persian, Irish		

Multicolor







Slovak, Norwegian, Korean, Croatian, Swedish



Support System	Android 8.0 and above iOS 10.8 and above
Bluetooth Version	5.1BLE (low power consumption
Display Resolution	360×360
Languages	Chinese, Traditional, English, Japanese German, Russian, Italian, French, Spanish Portuguese, Thai, Czech, Greek, Polish Vietnamese, Turkish, Romanian, Hungariar Danish , Finnish, Arabic, Ukrainian, Hebrew Persian, Irish, Slovak, Norwegian, Korear Croatian, Swedisi









MANUAL BREAST PUMP

P101

SINGLE SIDE ELECTRIC BREAST PUMP



DOUBLE SIDE ELECTRIC BREAST PUMP



INTEGRATED ELECTRIC BREAST PUMP






WEARABLE ELECTRIC BREAST PUMP



ACCESSORIES



Description























Structure of a breast pump

MANUAL BREAT PUMP




- 1-Suction bowl cap ×1
- 2-Suction bowl ×1
- 3-Mode pin ×1
- 4- Handle ×1
- 5- Breast shield cover ×1
- 6- Breast shield ×1
- 7- Pump connector ×1
- 8- Valve ×1
- 9- PP milk bottle ×1
- 10- Bottle teat set ×1
- 11-User Manual ×1

SINGLE SIDE ELECTRIC BREAST PUMP

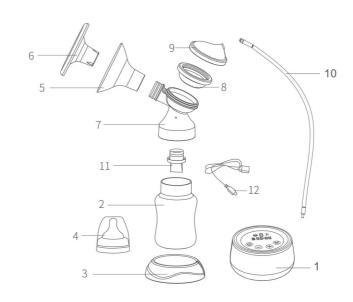


- 1- Pump ×1
- 2-PP milk bottle ×1(150ml)
- 3-Bottle base ×1
- 4-Bottle teat set ×1
- 5- Breast shield ×1
- 6- Breast shield cover ×1
- 7- Connector Body ×1
- 8- Suction bowl ×1
- 9-Suction bowl cap ×1
- 10-PVC Tube×1
- 11- Valve×2
- 12-Charging cable ×1
- 13-User Manual ×1

INTEGRATED ELECTRIC BREAST PUMP



- 1. Pump ×1
- 2. PP milk bottle ×1(150ml)
- 3. Bottle base ×1
- 4. Bottle teat set ×1
- 5. Breast shield ×1
- 6. Breast shield cover ×1
- 7. Connector ×1
- 8. Suction bowl ×1
- 9. Valve ×2
- 10. Charging Cable ×1
- 11. User manual ×1

WEARABLE ELECTRIC BREAST PUMP



- 1. Pump ×1
- 2. Diaphragm ×1
- 3. Silicone Stopper ×2
- 4. Milk Cup(150ml) ×1
- 5. Dust Cap ×1
- 6. Breast Shiled ×1
- 7. Valve ×2
- 8. Charging Cable ×1
- 9. Insert (19mm/22mm) ×1
- 10. User manual ×1

BREAST PUMP











Easy assembly and disassembly

Materials BPA-free



and assemble

Smart and portable



Fully soft silicone shield design



Separates the milk and air design



level massage to stimulate the breast





Features

Milk Bottle Capacity	150ml
Material	PP + Silicone
Advantage	2-speed Suction Adjustment
Color	White, Purple, Blue, Yellow

Single Side Electric Breast Pump







level suction power







Materials BPA-free

Easy assembly and disassembly

Stimulation

Features

Super quiet

Milk Bottle Capacity	150ml
Power Supply	1500mAh
Working Time	150 minutes
Advantage	High frequency vibration to stimulate the milk expression

D125 Double Side Electric Breast Pump















Materials BPA-free

level suction



Stimulation

Mode & Expression

Mode & Mixed mode

Easy assembly and disassembly



Features

Super quiet

Milk Bottle Capacity	150ml×2
Power Supply	1500mAh
Working Time	150 minutes
Charging Time	2.5 hours

D-119(BB) Double Side Electric Breast Pump



















Stimulation Mode & Expression Mode & Mixed mode







Milk Bottle Capacity	180ml×2
Power Supply	2000mAh
Working Time	150 minutes
Charging Time	2.5 hours





D-201 Integrated Electric Breast Pump







Super quiet

Features

Milk Bottle Capacity

Power Supply

Working Time

Charging Time

(E 150

level massage to stimulate the breast





Stimulation Mode & Expression Mode & Mixed mode



Materials BPA-free



and disassembly





180ml

900mAh

150 minutes

2.5 hours

level massage to stimulate the breast

(E ISO







level suction

power





Stimulation

Mode & Expression

Mode & Mixed mode

Features

Ŋ	Milk Bottle Capacity	180ml
ı	Power Supply	1000mAh
-	Working Time	150 minutes
-	Charging Time	2.5 hours

D-116 Wearable Electric Breast Pump









level massage to stimulate the breast

Super quiet

Features

Power Supply

Working Time

Charging Time

Milk Bottle Capacity



Materials BPA-free

level suction

power



Stimulation Mode & Expression



Easy assembly and disassembly

210ml

2000mAh

150 minutes

2.5 hours



Milk Bottle Capacity 140ml **Power Supply** 1500mAh **Working Time** 150 minutes **Charging Time** 2.5 hours

DQ-S19 Single Side Electric Breast Pump







level massage to stimulate the breast

Super quiet









Stimulation Mode & Expression Mode & Mixed mode



Easy assembly and disassembly

BREAST PUMP

BREAST PUMP















power







Features

Milk Bottle Capacity

Power Supply

Working Time

level massage to

stimulate the breast

(E ISO







Easy assembly and disassembly

210ml

1200mAh

150 minutes



Constant temperature

40°C Look

in nutrients



Heating

complementary



temperature



Quickly

all day

select materials

Electricity protection

Features

Thermostat Range	36°C-100°C(+5°C)
Disinfection power	150W
Material	Food Grade PP

















(E ISO

Easy assembly

and disassembly

Materials BPA-free

Features

Suction Power

Capacity

Material





Fully soft silicone shield design







Separates the milk and air design

-0.03KPa

100ml

PP + Silicone





explosion proof



meterial











tear seal

Features

(E ISO

10

tasteless

Convenient

to record


Material	ABS/Plestics
Rechargeable Battery Bapacity	600MAh (litium battery)
Charging Time	3h
Using Time	1h

BREAST PUMP







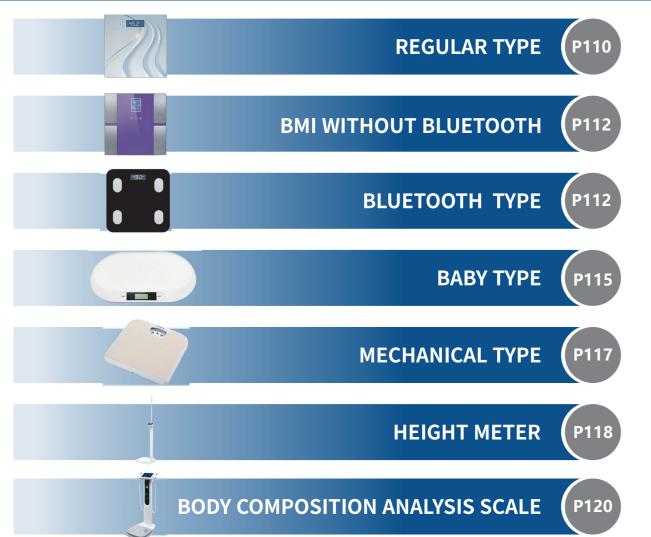

Description



Weight



High accuracy



Touch buttons



LCD display



Easy-to-read



Natural bamboo



measurement



Automatically off



Baby scale



Voice



Anti-slip design



Height measurement



Large size



Customizable voice



Large size tray



Bluetooth



Test 18 body data



ABS plastic case



Last measuring memory



Max 8 users



Integrated scale



ECG





No batteries



Micro USB port



A wide range of measuring





Regular





(E ISO







LCD display



Easy-to-read

Features

Power Supply

Boot Up Weight

Capacity

Glass Size

Display Size

(L×W×H)

Unit Dimensions



Fast measurement



Automatically off

2×AAA batteries 1.5V

3-180kg/6.6-396lbs

28×280×5mm

280×280×25mm *R10

60×24mm

5kg

KS-B8003

Regular





(E ISO









LCD display







Automatically off

Features

Power Supply	2×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Glass Size	280×280×6mm
Display Size	73×28.5mm
Unit Dimensions (L×W×H)	280×280×25mm *R3

Customizable Voice



KS-B7024 **Plastic leather**





(E ISO

Large size

Features

Power Supply

Boot Up Weight

Capacity

Glass Size

Display Size

(L×W×H)

Unit Dimensions











measurement

Automatically off

2×AAA batteries 1.5V

3-180kg/6.6-396lbs

280×280×6mm

300×300/280×280×25mm *R3

73×28.5mm

5kg

LCD display

(h)

KS-2004

Regular









Weight

Large size





High accuracy



LCD display





measurement



Automatically off

Features

Power Supply	2×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Glass Size	300×300×6mm
Display Size	71×34mm
Unit Dimensions (L×W×H)	300×300×20mm *R3

Different Shapes Edition







Regular





(E ISO



Weight

Easy-to-read

Features

Power Supply

Boot Up Weight

Capacity

Glass Size

Display Size

(L×W×H)

Unit Dimensions



Fast measurement





Automatically off

2×AAA batteries 1.5V

3-180kg/6.6-396lbs

Circular 300×5mm

300×300×23mm

61×24mm

5kg

ம்

KS-B1326





(E ISO









LCD display



Easy-to-read



Automatically off

Power Supply	2×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Bambo size	280×280×10mm
Display Size	73×28.5mm
Unit Dimensions (L×W×H)	280×280×25mm *R10

Front Panel Optional







Regular





High accuracy



Fast measurement

Features

Power Supply	2×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Bambo size	280×280×10mm
Display Size	73×28.5mm
Unit Dimensions (L×W×H)	280×280×25mm *R10

Natural Bamboo



Circular Edition

KS-F1302

BMI without Bluetooth







Max 10 users



Touch buttons

Features

Power Supply

Boot Up Weight

Capacity

Glass Size

Display Size

(L×W×H)

Unit Dimensions



Last measuring memory



Fast measurement



2×AAA batteries 1.5V

3-180kg/6.6-396lbs

280×280×6mm

300×300/280×280×25mm *R3

66×49mm

Automatically

5kg

Max 8 users











Bluetooth



High accuracy

LCD display



Test 18 body data



Automatic switch-on

Power Supply	2×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Glass Size	280×280×4.5mm
Display Size	60×24mm
Unit Dimensions (L×W×H)	280×280×25mm *R10

Bluetooth









Max 8 users





LCD display



Test 18 body data



Automatic switch-on

KS-BF8011

Bluetooth







Bluetooth



Max 8 users

High accuracy



ITO



switch-on

Features

Power Supply	4×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Glass Size	300×300×6mm
Display Size	72×28mm
Unit Dimensions (L×W×H)	300×300×25mm *R35

KS-FL565

Bluetooth





Bluetooth



Max 8 users



High accuracy



LCD display





Automatic switch-on

KS-FL562

Bluetooth





(E ISO



Bluetooth

Max 8 users



High accuracy

LCD display





Automatic switch-on

Features

Power Supply	2×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Glass Size	340×360×6mm
Display Size	70×90mm
Unit Dimensions (L×W×H)	340×360×25mm *R10

8 Electrodes



Features

Power Supply	2×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Glass Size	280×280×6mm
Display Size	73×30mm
Unit Dimensions (L×W×H)	280×280×25mm *R25

LED Display Edition

Rechargeable Edition

















Automatic

Features

Power Supply	3×AAA batteries 1.5V
Capacity	3-180kg/6.6-396lbs
Boot Up Weight	5kg
Glass Size	280×280×6mm
Display Size	70×90mm
Unit Dimensions (L×W×H)	280×280×25mm *R35

ECG Test













LCD display



Easy-to-read



Fast measurement



Automatically off

Features	
Power Supply	2×CR2032 batteries 3V
Capacity	0.5-100kg
Tray Size	530×270mm
Glass Size	300×300×5mm
Unit Dimensions (L×W×H)	530×300×50mm

Multifunctional



KS-YE8005

Baby Type





(E ISO







LCD display







measurement



Automatically off

Features

Power Supply	2×AAA batteries 1.5V
Capacity	0.01-20kg
Baby platform Size	560×260mm
Uint	kg/lb/st
Unit Dimensions (L×W×H)	545×323×35mm

Integrated



KS-YE8008

Baby Type





(E ISO



LCD display

Features

Power Supply

Capacity

Tray Size

2 Modes

(L×W×H)

Unit Dimensions

Height measurement



measurement

Fast

4×AAA batteries 1.5V

Diaper table /Baby scale

Automatic switch-on

0.01-20kg

790×300mm

790×300×50mm

155g

Large size tray





Easy-to-read

High accuracy

KS-M4

Baby Type



No batteries

Large size

Features

(E ISO

Baby scale

Material	ABS+0.7cm thickness iron
Capacity	20kg
Tray Size	540×268mm
Grad	0.1kg
Unit Dimensions (L×W×H)	545×345×135mm





115







Easy-to-read



High accuracy



Large size



No batteries

Anti-slip design

KS-M2

Mechanical





(E ISO



Easy-to-read

Weight



High accuracy



Anti-slip design

Large size No batteries

TS-H1 **Height Meter**









Height measurement

Easy-to-read



Micro USB port



High accuracy



Automatic switch-on

TS-H2 **Height Meter**



(E ISO



Height measurement

High accuracy



Easy-to-read





Large size

Features

Material	0.7 cm thickness iron
Capacity	130kg/286lb
Grad	1kg/2lb
Unit	kg/lb
Unit Dimensions (L×W×H)	268×266×53mm

Features	
Material	1.2cm thickness chrome-plated iron
Capacity	180kg /396.83lb
Grad	1kg/2lb
Unit	kg/lb
Unit Dimensions (L×W×H)	33.2*33.2*5.3cm

Other Design



Features

Power	USB charging
Unit	cm/ft
Grad	0.1cm
Height Measurement Range	30-200cm
Unit Dimensions (L×W×H)	220×50×77mm

Features

Large Dial Diameter	20.5cm
Capacity	180kg
Grad	1kg
Height Measurement Range	84-210cm
Unit Dimensions (L×W×H)	613×319×1058mm

TS-H3

Height Meter





(E ISO



Height measurement



Features

Power Supply

Height Measurement Range

Unit Dimensions

(L×W×H)

Capacity

Grad

LCD display



0.1cm accurate measurement



High accuracy





1500 mA lithium battery

type-C charging interface

0.2-203kg

0.05kg

83-209cm

345×500×214mm

Automatic switch-on

TS-H4

Height Meter







(E ISO





LCD display



0.1cm accurate measurement



High accuracy



A wide range of measuring

Features

Power Supply	AC100V-240V,50Hz
Capacity	5-300kg
Grad	0.1kg
Height Measurement Range	20-200cm
Unit Dimensions (L×W×H)	480×370×2300mm

SK-X90







Height measurement

(E ISO



LCD display

Features

Power Supply

Display Method

Unit Dimensions

(L×W×H)

Height Measurement Range

Capacity



0.1cm accurate measurement



High accuracy



Automatic switch-on

AC100V-240V, 50/60Hz

10.1 inch color color multi-touch screen

1-200kg

Manual input

625×405×2375mm



Height measurement

(E ISO

SK-X9L

Body Composition

Analysis Scale



LCD display









High accuracy





A wide range of measuring

Power Supply		AC100V-240V, 50Hz
Capacity		1-200kg
Display Method	10.1 inch col	or color multi-touch screen
Height Measureme	nt Range	90-210cm
Unit Dimensions (L×W×H)		625×405×2375mm





Description









































Joint massage





3 seconds gradually strengthening



Multi gear teeth flushing



Efficient cleaning



Large water tank

0



Long battery life

Features

mode

Power Supply	DC3.7V
Material	ABS+Print
Net Weight	231g
Color Box Size	12×25×6.5cm/22×6.5×6.5cm(small)
Packing Sheet	Nozzle/Usb data cable/Instruction

Upgrade Style



KET-02

Kids Electric Toothbrush



(E ISO



USB charging



Food grade Soft brush



Blue light antibacterial



360°no dead angle teeth cleaning



Deep waterproofing



Inteligent memory

Features

Rated Voltage	3.7V
Maxium Current	≤160mA
Rated Power	0.6W
Battery Capacity	250mAh
Waterproof Rating	IPX7

Two Type Brush



KET-01

Electric Toothbrush



Ş



(E ISO



Cartoon style

Features

DuPont Bristles

Battery Life

Clean Model

Upgrade Style

Waterfroof Level

30s Interval Pause Remind



Type C



Soft silicone nozzle



Three child protection modes

90 days

3 Models

IPX7

child ction



Facial Steamer



fumigation

Deep hydration













Activate cells



Integrated sink

Rated Power	300W
Rated Voltage	110-220V
Steam Volume	6.5g/min
Water Capacity	65ml
Frequency	50Hz





Big spray





Deep hydration





Features

Upper spray design

Rated Power	80/100W
Rated Voltage	110-240V
Steam Volume	3.5g/min
Water Capacity	50ml
Frequency	50/60Hz

Two Type Mask



KEM-01

Eye Massager



(E ISO







Upgrade 3D Flex Airbag Massage



Skin-friendly and breathable



Four majormodes



Comprehensive massage



New upgrade Bluetooth music

Features

Material	Graphene Thermal Conductive+ABS Plastic
Features	Airbag massage, second level hot compress, Bluetooth music
Rated voltage	5V
Battery Capacity	850mAh
Full Charge Usag	Time 60 minutes

KM-01

Massage Gun







Multi gear adjustment



One key switch

Features

Battery Capacity

Operating Voltage

Rotation Speed

Product Size

Gear



Powerful motor



long battery life



1||10



1400 mAh

1800-3200rpm

6 gears optional

17.4×14cm

7V

Material	ABS+P
Control Panel	Mechanical switch
Power line length	1.5n
Net Weight	1.1k
Product Size	42×14×15cr

Massage Stick







Simple operation



Simulated massage



Low noise mute



Environmentally friendly materials



Double head massage

Material	ABS+PP
Control Panel	Mechanical switch
Power line length	1.5m
Net Weight	1.1kg
Product Size	42×14×15cm

KSM-01 Shoulder Massager



(E ISO

2 gears

Energy saving

Features

Material

Control Panel

Net Weight

Product Size

Power Line Length



Suitable for multiple locations



One click start



Intelligent temperature control

ABS+PU

1.2m

1.2kg

Push-button

50×38×14cm

KSM-02

Neck Massager



(E ISO



6 types of electric pulse massage modes



Circular traction relieve pain

2

ABS material



Mini portable



Timer setting

Features

Material	ABS
Rated Power	1.66W
Rated Voltage	3.7V
Battery Capacity	150mAh
Massage Duration	15mins/time

KFM-01

Foot Massager



(E ISO



Multiple modes



Fumigation foam

Features

Material

Rated Voltage

Net Weight

Product Size

Rated Input Power

Intelligent temperature regulation



Smart

Material	ABS
Rated Power	5W
Rated Voltage	3.7\
Net Weight	180g
Product Size	10×20cm

Deepen the large barrel





screen

ABS

1.5m

1671g

39.5×32×22.5cm

220V/50Hz

Water electricity

separation

LED



KWM-01

Waist Massager





Three level temperature regulation



Large area heating



Far-infrared heating



Relieve menstrual pain



Vibration massage

Features	
Material	ABS
Rated Power	5W
Rated Voltage	3.7V
Net Weight	180g
Product Size	10×20cm





9-level vibration massage

Warm

compress

Product Size



Portable



fabric

Three level temperature control





Long battery life

27.8×18cm

Features Material ABS 2600 mAh **Battery Capacity Charging time** 3.0h±0.5h **Net Weight** 266g

KKM-02

Knee Massager



(E ISO



Joint massage



Three level hot compress





Vibration massage



Intelligent timing

Ō

Features Material ABS 10W **Rated Power Rated Voltage** 3.7V 2400mAh **Battery Capacity Full Battery Working Time** about 90mins

KMS-02 Pillow Massager



(E ISO



Simulated human massage



The whole body can be pressed

Features

Material

Rated Power

Rated Voltage

Net Weight

Product Size



Vigorous pounding

Three levels of strength



SSS

Positive and negative kneading

PU

24W

12V

1.35kg

34×12.5×38cm

KBM-01

Back Massager



(E ISO



15 Gaussian



Multi frequency micro vibration





Double low-frequency pulse

Timed shutdown



Acupoint convex point massage

Features

ABS
22W
12V
1600g
45×31×7cm